


PAVEMENT[®]

serving Maintenance & Reconstruction contractors

ADVANCING
THE WORLD OF PAVEMENTS

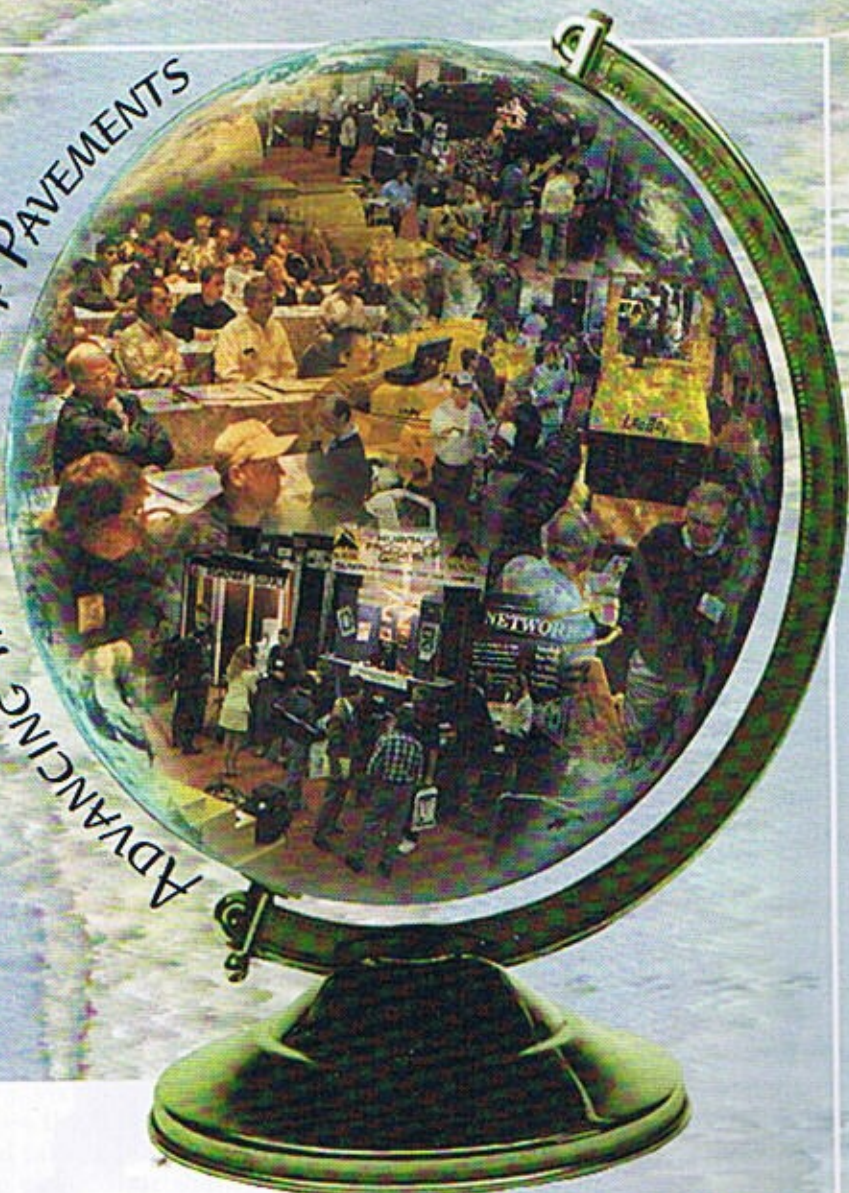

NATIONAL PAVEMENT
NPME
MAINTENANCE EXPO

February 1998
Volume 13/Number 2

- *Complicated striping in Nebraska*
- *Successful sealcoating in Maryland*
- *California sweeping ruling might move east*
- *Effective use of paving fabrics*

spun together (spunbond process). The other uses short staples of filaments 6 to 12 in. long which are arranged on a carded conveyor system. Barbed needles go up and down through the filaments, entangling the strands together forming the fabric.

A calendering (heat bonding) finish can be applied to fabric at the end of the manufacturing process.

Needlepunched fabric is thick-

er, fuzzy, softer and more pliable than non-needlepunched fabric. Benefits are that it installs smoother with less wrinkles due to its high elongation (stretch) and seems to bond better to the oil and old asphalt.

Numerous reports state the fabric's fuzzy side, when placed onto the asphalt tack coat on the old pavement surface, provides reinforcement at the interface. The fuzzy side provides a greater effective surface area of the fabric which offers better adhesive and shear strength with far less slippage.

Non-heatbonded needlepunched fabrics have inherent installation problems and is not an effective paving fabric.

Installation problems

Dual-sided heat-bonded fabrics have installation problems such as wrinkles and folds that transverse the full width of fabric.



Thin fabric doesn't hold tack coat as easily, resulting in bleed through, which can be hazardous to workers and equipment.



include delimitation and fuzzing during installation. FHWA-Texas report 261-2 mentions problems with non-heatbonded fabrics on every test section, delaminating and fuzzing up in the wheel paths of traffic during construction. These problems result in increased labor costs and slows construction. Other results include reduced long-term performance because damaged fabric leaves little or no



**THE COMPANY THAT YOU
LEASE FROM IS JUST
AS IMPORTANT AS THE
EQUIPMENT YOU LEASE!**

RSR CAPITAL CORP.

Automotive Management Group, Ltd.

1-800-394-7771

Leasing Specialist

Jason Shechtman (National Account Mgr.) Ext: 211



Dual-sided heatbonded fabrics are thin and stiff and have a tendency to curl up when installed by hand.

membrane in the wheel paths.

Heatbonding on one side is a process where one side of the needlepunched filaments are heated to form a tough wearing surface which is necessary in a paving fabric to provide for a tough surface on one side of the fabric for truck traffic to drive on without tearing up the fabric.

The other side remains soft and fuzzy resulting in a better bond. A light heating is called calendaring, which helps the fabric hold up during construction without delamination or fuzzing.

The only installation problem that can occur is that the fabric can be placed upside down. The heat bonded side must be up and the fuzzy side placed to the tack coat. Otherwise both delamination and slippage can occur.

3. Dual sided heatbonded fabrics are very thin and stiff. Installation problems with dual sided heatbonded fabrics include: difficulty in placing smoothly, wrinkles and folds transverse the full width of the fabric.

Help Out Your Industry!

Watch Your Mail for
Pavement's
1998 Contractor
Ranking Survey,
which will be mailed early
in February.

Also, dual-sided heatbonded fabrics have no fuzzy side and have been prone to slippage problems. Also, the thin fabric does not hold tack coat easily and bleed-through occurs causing hazards to the workers and equipment. The fabric is stiff and has a tendency to curl up when installed by hand.

4. Resin-bonded fabrics add a chemical process which forms the fabric. This is similar to glu-

ing and is seldom used in any geotextile anymore. The fabric is thin, stiff and has problems absorbing a tack coat since much of the absorption area is full of the chemical used for bonding.

Mounque Barazone is president of Geotextile Apparatus Co., San Diego.

Lee Boy

Designed with the paving man in mind...



635

MOTOR GRADERS



685



8000B

PULL TYPE



700



1000B

PAVERS

900S



400

400T

ROLLERS



TACK DISTRIBUTOR



MAINTAINERS

B.R. LEE INDUSTRIES HAS BEEN MANUFACTURING ASPHALT EQUIPMENT FOR 26 YEARS. FOR MORE INFORMATION CALL-

B.R. LEE INDUSTRIES
P.O. BOX 370 • DENVER, NC 28037
704-483-9721 FAX 704-483-5802

☐ INDICATE 120 ON INQUIRY CARD

Official Exhibitor at **NPME '98**