

Aberdeen's



pavement maintenance®



The Aberdeen Group
Volume 8/Number 3 \$3.00
March 1993



NPME: Advancing The World of Pavement

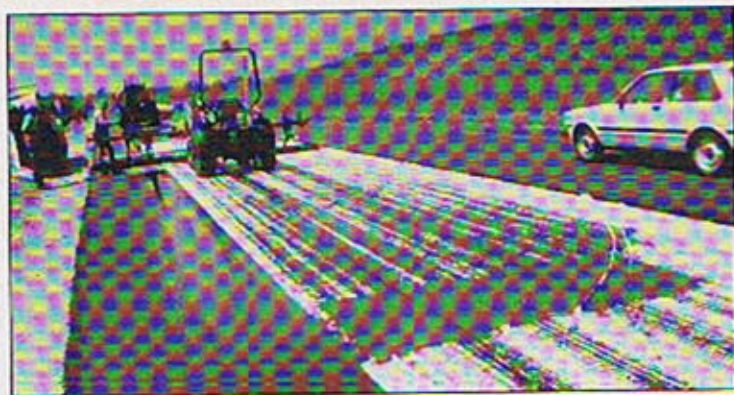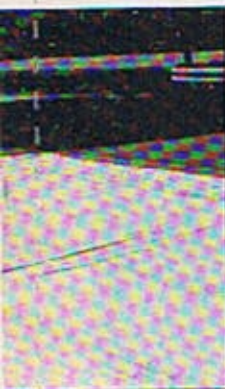

Dual heat-bonded fabric (left) is very stiff, and wrinkles span the fabric width.

The bleed-through (right) here resulted from the use of dual heat-bonded fabric, which is thin and has poor absorption characteristics.

ric. This is similar to gluing and is seldom used. The fabric is thin, stiff, and has problems absorbing a tack coat.

Government reports

Numerous states have published dozens of reports with FHWA since 1975 concerning the use and performance of pavement fabrics under different climatic conditions. Temperatures ranged in excess of 104° F and as low as -30° F.

Most of these reports show great success with fabrics, but some show failures. In most instances the failures have been traced to improper installation techniques and the fabric chosen.

The most extensive studies were conducted by Caltrans and published in 1991 with the FHWA. The studies covered 24 test and control sections paved over 12 years and concluded:

"Asphalt concrete overlays incorporating paving fabric interlays had less alligator cracking than conventional asphalt concrete overlays that were up to 0.10 foot thicker. It is recommended that [fabric interlayer membranes] be used to replace approximately .10 foot of [asphalt concrete] where additional tensile and flexural stiffness is not required."

This results in savings as much as \$1.13 per square yard over a thicker overlay.

As far as overlays on PCC pavement are concerned, studies have found that "[paving fabric interlays] appear to reduce transverse cracking in thinner overlays. . . by .20 to .40 foot over distressed

HOT PERFORMANCE From a Cold-Pour Sealant

New Dynaflex® acrylic crack sealant gives you the cost saving and convenience of a cold-pour crack sealant yet bonds aggressively to the side walls of cracks like traditional hot-pour sealants. This unique sealant remains flexible in severe climate conditions and provides a way for contractors to save time and labor.

- Ready for traffic or sealcoating in 60 minutes
- Fuel and oil resistant (Passes D466, 24 hr gasoline emersion test)
- Available in black and gray (also red or green for tennis courts)



DYNAFLEX®


The first acrylic crack sealant that performs like a hot-pour sealant
...for a fraction of the cost!



Call a NEVRA distributor today to place an order or receive additional information.

CALL THE PLANT NEAREST YOU:

OHIO	1-800-543-7077
VIRGINIA	1-800-888-4098
TEXAS	1-800-345-1493
FLORIDA	1-800-992-9930
CONNECTICUT	1-800-666-3972
WISCONSIN	1-800-545-0260

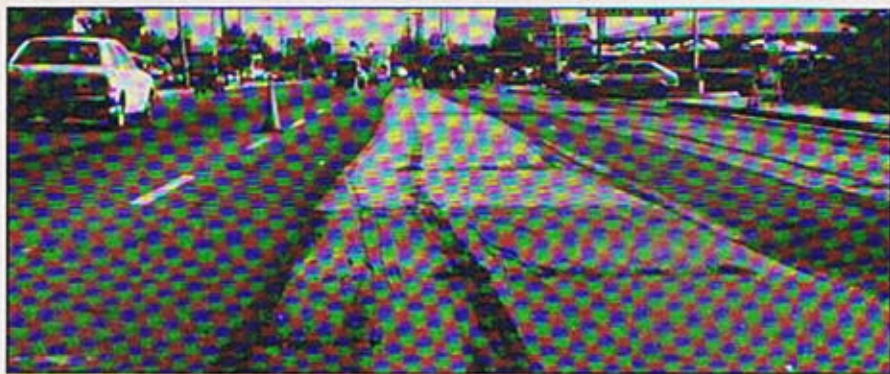

PCC pavement by approximately one transverse crack per 100 feet after eight years of service.


"In a comparison of performances of 12 different proprietary fabrics in 24 test sections over distressed PCC pavements, there were no significant differences in cracking between any of the fabrics." At least two other studies confirmed these observations, provided the fabric was placed properly.

In 1989, after 15 years of field evaluation, Caltrans changed its specifications to permit only non-

This needle-punched fabric, heat-bonded on one side, was installed upside down, causing delamination of the fabric.

woven, needle-punched fabric, heat-bonded on one side. In 1991, Los Angeles County also changed to this type of fabric and has recently introduced the most comprehensive specification in existence today. **PM**


Mounque Barazone is president of Geotextile Apparatus Co. (GAC), San Diego, Calif. This is the first in a series of articles on the state-of-the-art of paving fabrics.

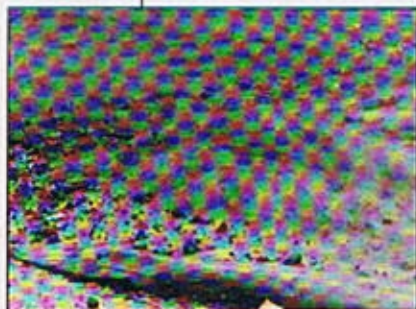

A closeup of the fuzzing of a nonheat-bonded fabric.

Marathon

Official Exhibitor at
NPME '93

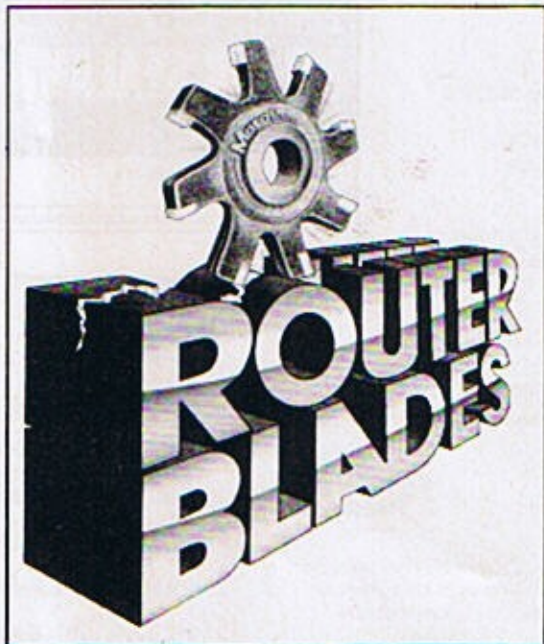

CARBIDE TIPPED ROUTER BLADES

ARE:

- The most engineered and field tested blades on today's market with years of experience.
- Engineered to increase production/Decrease downtime/Prolong life.
- Engineered to fit all existing makes of pavement routing equipment.
- Patented in the U.S.A. and Canada.

For More Information Call:

Tel: (416) 825-9675 Fax: (416) 827-0322

M **Marathon**
ROAD MAINTENANCE EQUIPMENT

A Division of Marathon Blades Ltd.

3328 Burnhamthorpe Rd.W.
Oakville, Ont., Canada L6J 4Z3

CARBIDE TIPPED ROUTER BLADES are only part of the equipment that Marathon produces for Road Maintenance. Contact us for the name of your closest dealer or for information on our complete line.